



**Collection:** NO COLLECTION

**Finish\*:**



NF - Neutral

**Main features:**



### Features

- **DIMENSIONS:** 50 cm
- **MATERIAL:** N/A
- **NORMS AND REGULATIONS:** NF
- **FLUSH MECHANISM:** Dual flush
- **WATER CONSUMPTION:** Standard 3/6 L
- **QUIET MECHANISM:** Class 1
- **QUIET FLOAT VALVE:** Yes

- **WEIGHT:** 17 kg
- **INSTALLATION TYPE:** Wall-mount
- **SUPPORT FRAME GUARANTEE:** 2 years
- **SINGLE/DUAL FLUSH:** Dual button
- **SUPPORT TYPE:** Wall support frame
- **CISTERN SOUND AND HEAT INSULATION:** Yes
- **SUPPLIED:** Two M12 threaded rods for mounting the toilet with protection.


### Consumer benefits

- **RESISTANT:** Steel frame withstanding a load of 400 kg, anti-corrosion treatment
- **WATER EFFICIENCY:** Float valve with delayed refill, up to 9L of water saved daily

### Installation benefits

- Support frame can be height adjusted 0 to 20 cm with "hands-free" system
- Lock into place without wall bracket tools

### Technical drawing

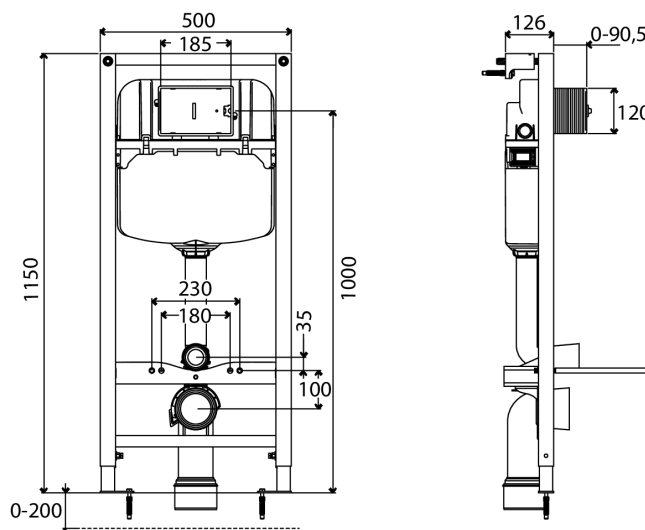

Product Specification: Support frame. E24156. Collection: NO COLLECTION. DIMENSIONS: 50 cm. WEIGHT: 17 kg. MATERIAL: N/A. INSTALLATION TYPE: Wall-mount. NORMS AND REGULATIONS: NF. SUPPORT FRAME GUARANTEE: 2 years. FLUSH MECHANISM: Dual flush. SINGLE/DUAL FLUSH: Dual button. WATER CONSUMPTION: Standard 3/6 L. SUPPORT TYPE: Wall support frame. QUIET MECHANISM: Class 1. CISTERN SOUND AND HEAT INSULATION: Yes. QUIET FLOAT VALVE: Yes. SUPPLIED: Two M12 threaded rods for mounting the toilet with protection..