




Collection: MODULO

Finish\*:



CP - Chrome

Main features:

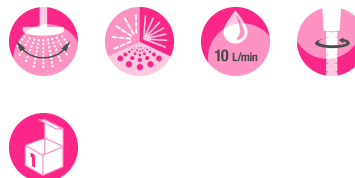

### Features

- **MATERIAL:** Metal
- **SHOWER TAPS-HANDSHOWER FLOW:** 10 L/min
- **WARRANTY DURATION (YEARS):** 5


### Consumer benefits

- **A PERFECT INSTALLATION FOR EVERYDAY USE:** Its wide head Ø25 cm wraps you in a relaxing shower of water, ideal for a moment of relaxation or for rinsing your hair effectively. The shower is also equipped with a multi-jet hand shower, which is more practical for daily showers without shampoo.
- **A SHOWER WITH A CONSTANT TEMPERATURE WITHOUT THE RISK OF BURNING:** High-precision thermostatic cartridge which avoids excessive temperature variations that are unpleasant in the shower. Temperature limited to 50°C. Automatic water shut-off in case of cold water cut-off to avoid any risk of burning.
- **EASY TO USE IN EVERYDAY LIFE:** Temperature Marking (blue and red). Comfort Temperature setting of 38°C is indicated. A handle which regulates the temperature and another which regulates the flow rate and the changeover from the overhead shower to the hand shower.
- **EXTREMELY RESISTANT:** Metal façade for high quality finish and durability of the installation. Flush-mounted housing with leak-proof design for guaranteed water resistance over time. Drainage system to avoid water condensation in the recessed housing.

### Installation benefits

- **ALL-IN-ONE KIT:** It is possible to create a built-in shower without forgetting anything! This all-in-1 package provides you with everything required to install a functional concealed shower in a single package. Contents of the pack: Thermostatic front panel with adjustment handles, Ø250 mm head shower and wall connection arm, Ø100 mm hand shower with 5 jets, anti-twist hose, hand shower holder, outlet elbow, modulo flush-mounted box, step-by-step installation guide.
- **AN EASY TO INSTALL FLUSH-MOUNTED BOX:** Integrated spirit level for a perfectly smooth installation. "Dents" to mark the cutting area. Designed to suit different types of installation: against a wall, away from the wall, in drywall, with cut-outs in a solid wall. Bolts kept in the body of the box so that they are not lost during installation or when the box is unpacked. Guide system inside the Modulo box for easier and safer valve assembly. Installation possible between 80 and 110 mm, but adjustment kits are available: for deeper recesses - between 110 and 150 mm including tiles - order the reference: 98701D-NF (shims of 20 mm or 40 mm) for limited depth installation - between 67 and 80 mm finished wall thickness including tiles - order reference: E98700-CP (possibility to insert a heavier façade to cover the valve).

### Technical drawing

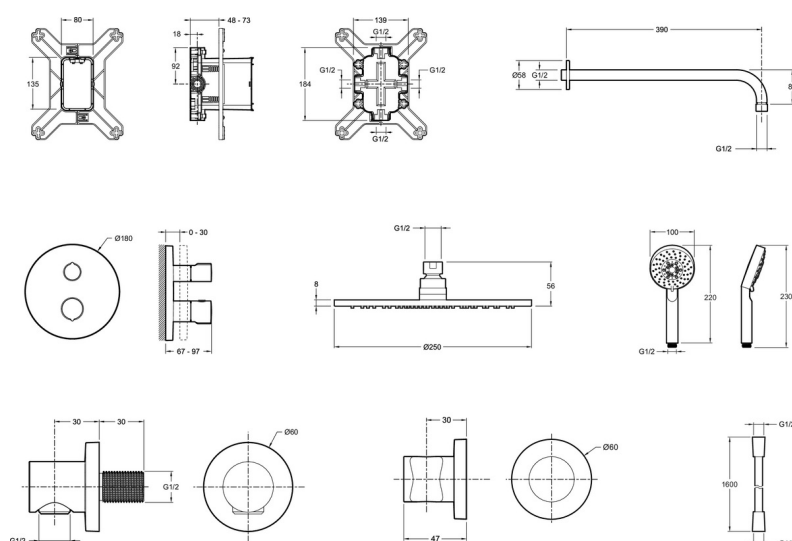

Product Specification: Recessed thermostatic shower - round style. E30758. Collection: MODULO. MATERIAL: Metal. INSTALLATION TYPE: Wall-mount. SHOWER TAPS-HANDSHOWER FLOW: 10 L/min. NUMBER OF SPRAYS: 5. WARRANTY DURATION (YEARS): 5.