



**Collection:** NO COLLECTION

### Main features:



### Features

- **WEIGHT:** 17 kg
- **INSTALLATION TYPE:** Wall-mount
- **WATER CONSUMPTION:** Low flush 2.6/4 L
- **QUIET MECHANISM:** Classe 1
- **QUIET FLOAT VALVE:** Yes
- **SUPPLIED WITH :** 2 M12 threaded rods to fix the toilet bowl, with protective caps.
- **MATERIAL:** N/A
- **SUPPORT FRAME GUARANTEE:** 2 years
- **SUPPORT TYPE:** In wall
- **CISTERN SOUND AND HEAT INSULATION:** Yes
- **SUPPORT FRAME FIXINGS:** Supported on masonry wall resistant to the load of the basin

### Consumer benefits

- **DURABLE:** Reinforced corrosion-resistant chassis around the pipe (400 kg), tank insulated against condensation
- **QUIET :** silent float valve, acoustic class 1
- **WATER SAVINGS:** In wall tank set up in 2,6/4L


### Installation benefits

- **EASY INSTALLATION:** Height adjustment of the support frame from 0 to 20 cm facilitated by a "hands-free" system
- **Tool-free locking of wall mounting brackets**

### Required products

- E20858: Flush plate
- E20859: Flush plate

### Technical drawing

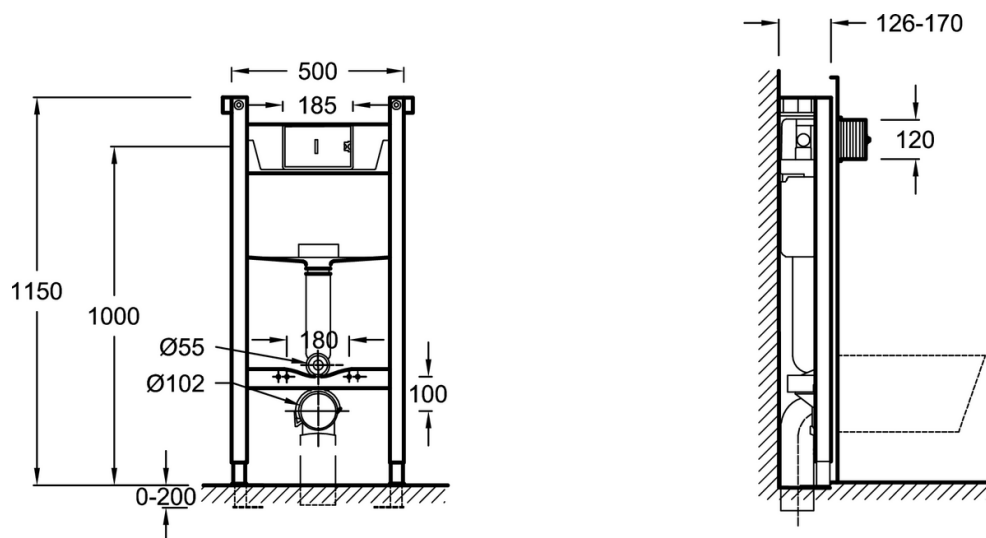

Product Specification: Wall-mount support frame with 2,6/4 L cistern. E31670. Collection: NO COLLECTION. WEIGHT: 17 kg. MATERIAL: N/A. INSTALLATION TYPE: Wall-mount. SUPPORT FRAME GUARANTEE: 2 years. WATER CONSUMPTION: Low flush 2.6/4 L. SUPPORT TYPE: In wall. QUIET MECHANISM: Classe 1. CISTERN SOUND AND HEAT INSULATION: Yes. QUIET FLOAT VALVE: Yes. SUPPORT FRAME FIXINGS: Supported on masonry wall resistant to the load of the basin. SUPPLIED WITH : 2 M12 threaded rods to fix the toilet bowl, with protective caps..