




**Collection:** JULY+

**Finish\*:**



CP - Chrome

**Main features:**

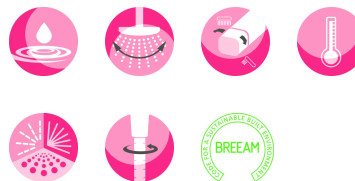

### Features

- **DIMENSIONS:** 30.40 x 60.40 x 121.20 cm
- **MATERIAL:** Metal
- **FLOW RATE:** 9 l/mn
- **HOLE CONFIGURATION:** 150
- **SHOWER TAPS-WATER/ENERGY SAVING:** Yes
- **SINGLE-LEVER TAPS:** Thermostatic
- **SHOWER TAPS-SAFETY STOP:** 38°C
- **SHOWER TAPS-NON-RETURN VALVE:** Yes
- **HOSE TYPE:** Smooth, anti-twist
- **WEIGHT:** 5.2 kg
- **INSTALLATION TYPE:** Wall-mount
- **CONNECTION:** With connectors and wall escutcheons
- **TYPE:** Single-lever
- **WITH OR WITHOUT BRASSWARE:** With
- **SHOWER FIXTURE - SHOWERHEAD SHAPE:** Round
- **SHOWER TAPS-MAXIMUM TEMPERATURE:** 50°C
- **SHOWER TAPS-HANDSHOWER FLOW:** 7 l/mn
- **NUMBER OF SPRAYS:** 3

### Consumer benefits

- **WATER SAVING:** Mid-flow sensitive setting
- **REINFORCED ANTI-SCALD SAFETY:** An automatic water cut-off in case of a cold water cut-off and a temperature limit of 50°C
- **ERGONOMICS:** Easy-to-handle handles, head / bath diverter integrated into the handle, diverter for hand shower / bath
- **EASE OF USE:** A 38°C setting ensures the ideal temperature


### Installation benefits

- **ADJUSTABLE ROD:** the height of the cane is adjustable on installation

### Optional products

- E24316: Anti-slip shelf

Product Specification: Shower column. E35680-9. Collection: JULY+. DIMENSIONS: 30.40 x 60.40 x 121.20 cm. WEIGHT: 5.2 kg. MATERIAL: Metal. INSTALLATION TYPE: Wall-mount. FLOW RATE: 9 l/mn. CONNECTION: With connectors and wall escutcheons. HOLE CONFIGURATION: 150. TYPE: Single-lever. SHOWER TAPS-WATER/ENERGY SAVING: Yes. WITH OR WITHOUT BRASSWARE: With. SINGLE-LEVER TAPS: Thermostatic. SHOWER FIXTURE - SHOWERHEAD SHAPE: Round. SHOWER TAPS-SAFETY STOP: 38°C. SHOWER TAPS-MAXIMUM TEMPERATURE: 50°C. SHOWER TAPS-NON-RETURN VALVE: Yes. SHOWER TAPS-HANDSHOWER FLOW: 7 l/mn. HOSE TYPE: Smooth, anti-twist. NUMBER OF SPRAYS: 3.

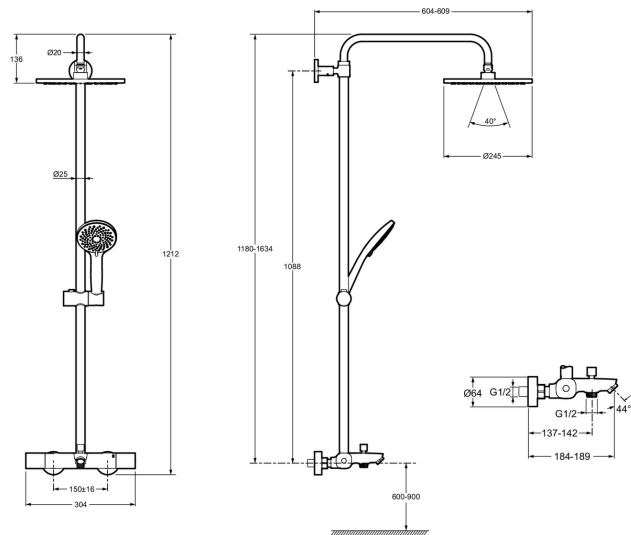

Product Specification: Shower column. E35680-9. Collection: JULY+. DIMENSIONS: 30.40 x 60.40 x 121.20 cm. WEIGHT: 5.2 kg. MATERIAL: Metal. INSTALLATION TYPE: Wall-mount. FLOW RATE: 9 l/mn. CONNECTION: With connectors and wall escutcheons. HOLE CONFIGURATION: 150. TYPE: Single-lever. SHOWER TAPS-WATER/ENERGY SAVING: Yes. WITH OR WITHOUT BRASSWARE: With. SINGLE-LEVER TAPS: Thermostatic. SHOWER FIXTURE - SHOWERHEAD SHAPE: Round. SHOWER TAPS-SAFETY STOP: 38°C. SHOWER TAPS-MAXIMUM TEMPERATURE: 50°C. SHOWER TAPS-NON-RETURN VALVE: Yes. SHOWER TAPS-HANDSHOWER FLOW: 7 l/mn. HOSE TYPE: Smooth, anti-twist. NUMBER OF SPRAYS: 3.

*\*Due to possible variations in computer and printer calibrations, technical factors and certain finish characteristics, the colors you see may not accurately portray the actual colors and are provided as a guide only.*