

**Collection:** JULY

**Finish\*:**



CP - Chrome

**Main features:**



### Features

- **WEIGHT:** 2.1 kg
- **INSTALLATION TYPE:** 2 holes
- **TYPE:** Single-lever
- **CONNECTION:** With connectors and wall escutcheons
- **HOLE CONFIGURATION:** 150 ± 15
- **SHOWER TAPS-DIVERTER:** Automatic pushbutton diverter
- **WARM BODY:** Yes
- **Water savings:** push-in button at mid-flow

- **MATERIAL:** Metal
- **NORMS AND REGULATIONS:** NF : ID/A - ECAU : E3/1 C3 A3 U3 - Ge5 - ACS : 10 ACCLY 103
- **FLOW RATE:** 20 l/mn
- **MECHANISM:** Expanding wax thermostatic cartridge
- **SHOWER TAPS-WATER/ENERGY SAVING:** Yes
- **SAFETY STOP:** 37°C
- **MECHANISM GUARANTEE:** 5 years
- **Non-return valves** on supplies



### Consumer benefits

- **SAFETY:** Maximum temperature set at 50°
- **Anti-scale aerator**

### Installation benefits

- **EASY INSTALLATION:** Connectors and wall escutcheons

### Technical drawing

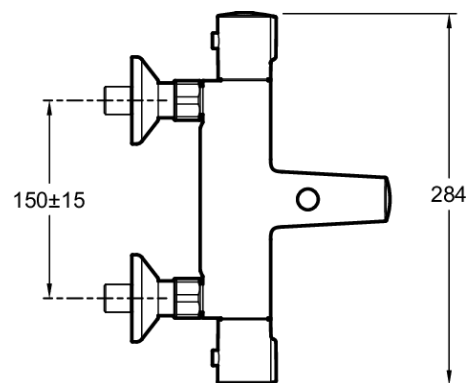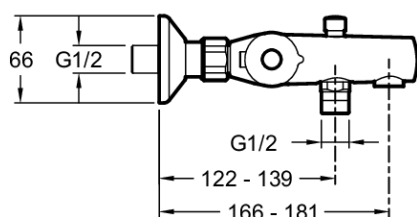

Product Specification: Thermostatic single-lever wall-mount bath/shower mixer. E45714. Collection: JULY. WEIGHT: 2.1 kg. MATERIAL: Metal. INSTALLATION TYPE: 2 holes. NORMS AND REGULATIONS: NF : ID/A - ECAU : E3/1 C3 A3 U3 - Ge5 - ACS : 10 ACCLY 103. TYPE: Single-lever. FLOW RATE: 20 l/mn. CONNECTION: With connectors and wall escutcheons. MECHANISM: Expanding wax thermostatic cartridge. HOLE CONFIGURATION: 150 ± 15. SHOWER TAPS-WATER/ENERGY SAVING: Yes. SHOWER TAPS-DIVERTER: Automatic pushbutton diverter. SAFETY STOP: 37°C. WARM BODY: Yes. MECHANISM GUARANTEE: 5 years. Water savings: push-in button at mid-flow. Non-return valves on supplies.